



human touch®  
massage chairs

HT-2620/iJOY-300

January 03, 2011

## REPLACING THE POWER PANEL


It is imperative that Human Touch® products are repaired in a manner that ensures product safety and regulatory compliance and that is fully consistent with the practices used during the manufacturing process. Therefore, Human Touch requires that all product repairs are performed using only factory-new parts and in accordance with these repair instructions. Failure to adhere to these instructions voids the product warranty and releases Human Touch from all liability for injury or product damage resulting from the repair.



SERVICE LEVEL: 2

**Tools Required:** Phillips-head screwdriver, flat-head screwdriver.


SAVE ALL REMOVED PARTS FOR USE DURING REASSEMBLY

### REMOVING THE POWER PANEL


1. Turn the power switch on the power panel to OFF and unplug the chair. 
2. Tip the chair gently forward, until the backrest is resting on the floor (Fig.1).
3. Using a Phillips-head screwdriver, remove the four screws from the inside of the power panel (Fig.2).
4. Detach the power panel from the chair to expose the connectors (Fig.3).
5. Disconnect the two sets of connectors (Fig.3).
6. Using a flat-head screwdriver, remove the screw that secures the green grounding wire to the chair (Fig.3).
7. Remove the power panel from the chair.

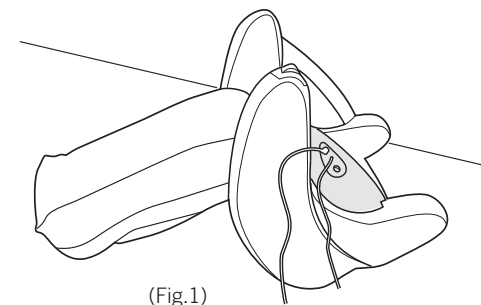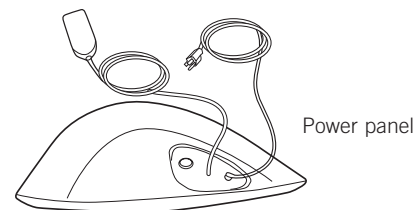

(Fig.1)

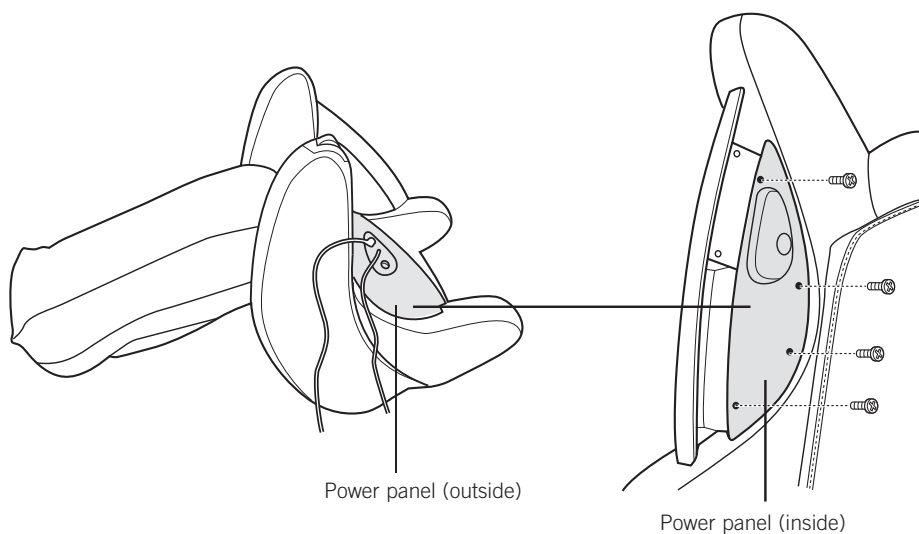

(Fig.2)

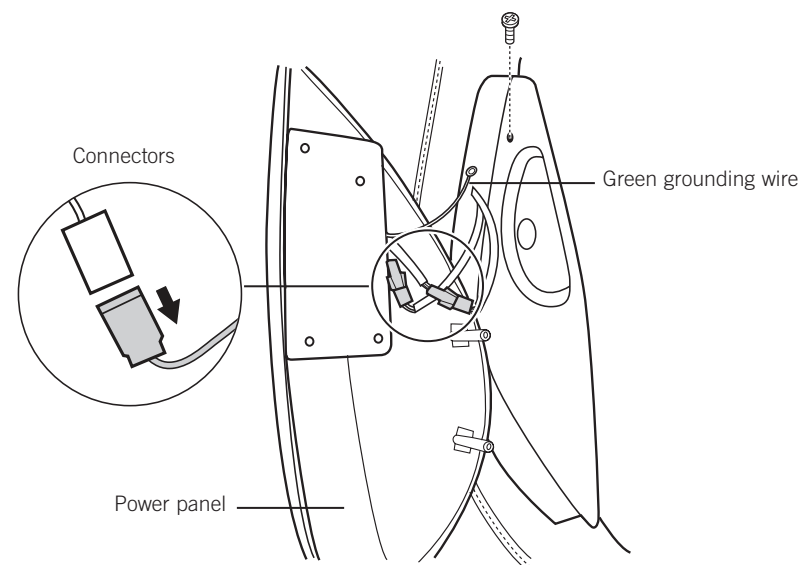

(Fig.3)

## INSTALLING THE NEW POWER PANEL

1. Holding the new power panel next to the chair base, connect the two sets of power panel connectors to the corresponding connectors on the chair base.
2. Using a flat-head screwdriver and screw, attach the green grounding wire to the chair using the threaded screw hole as shown.
3. Position the power panel firmly into place, then secure it using the four screws.
4. Tip the chair gently back to an upright position.
5. Plug in the chair and power it on.
6. Verify that the chair is now receiving power and that the remote control is working properly.